

WASH Site Profile - Camp 20

Ukhiya, Cox's Bazar, Bangladesh (February 2018) GPS Coordinates: 92.1402373 21.19092376



Summary

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Camp 20 in Ukhiya, Cox's Bazar. Primary data for this round was collected between 4-20 February 2018. Findings should be considered indicative only.

of individuals: 852 # of households: 238 # of shelters: 219 # of individuals 4


per shelter:

of latrines 51 (96%) (% functional): % of safe latrines²: 65% # of handpumps 23 (87%) (% functional): # of washrooms: 51





Access to Water

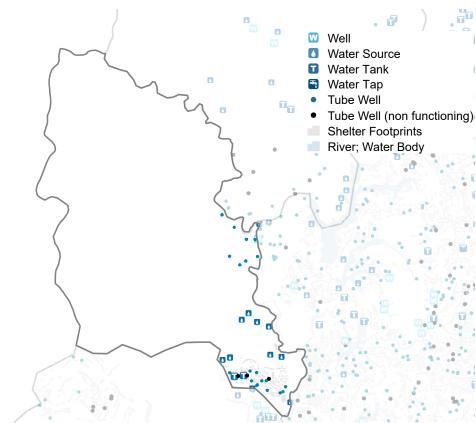

Three most commonly identified types of water points, by functionality

91% Handpump/tubewell	87%	13%	
9% Water tank	100%	0%	Functional Non-functional

Key sectoral achievements

,	Target	Current Round	Achievement
# of people per functional handpump	max. 500 ³	43	
% of shelters with at least 1 functional handpump within 200m ⁴	100%	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

¹ REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. ² Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) ³ This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. ⁴ The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.






WASH Site Profile - Camp 20





Sanitation

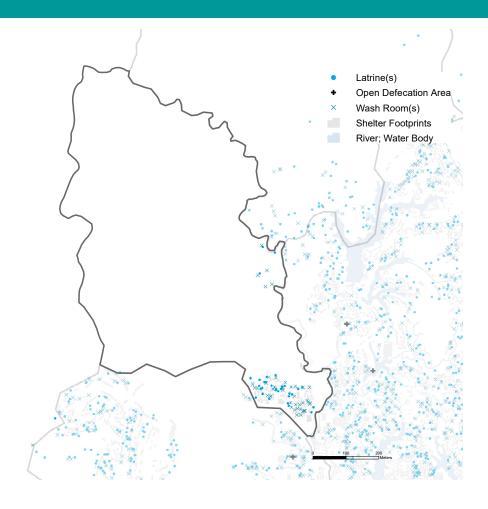

Latrine characteristics

% of functional/non-functional latrines



functional (non-full) latrines non-functional latrines





% of latrines with/without lights



Key sectoral achievements

	Target	Current Round	Achievement
# of people per functional (non-full) latrine	max. 50 ⁴	17	
# of people per safe latrine	N/A	26	N/A
% of shelters with at least one functional latrine block within $50m$	100%	96%	
% of functioning handpumps with no latrine within 10m	100%	80%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/Indicators as

⁴This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



