

# **WASH Site Profile - Camp 2W**

Ukhiya, Cox's Bazar, Bangladesh (March 2018) GPS Coordinates: 92.15832283 21.20891244



#### **Summary**

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Camp 2W in Ukhiya, Cox's Bazar. Primary data for this round was collected between 11 March - 2 April 2018.¹ Findings should be considered indicative only.

#### **Site Overview**

# of individuals:	24483
# of households:	5716
# of shelters:	2967
# of individuals per shelter:	8

#### **Key WASH Infrastructure**


# of latrines	658
(% functional):	(81%)
% of safe latrines <sup>2</sup> :	76
# of handpumps	176
(% functional):	(78%)
# of washrooms:	137

#### **Location Map**





## **Access to Water**

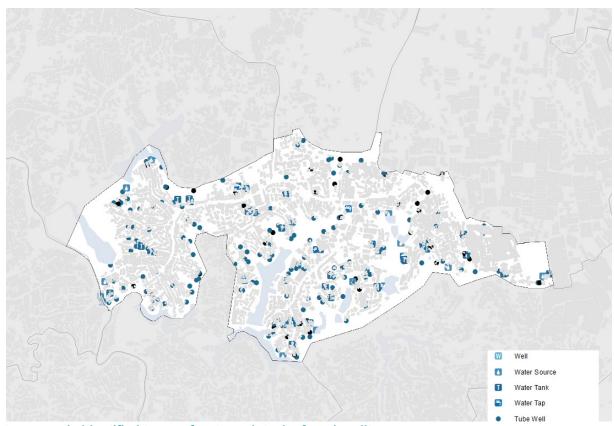

### Three most commonly identified types of water points, by functionality

76%	Handpump/tube well	77%	23%	
81%	Water tank	89%	11%	Functional  Non-functional
5%	Unimproved water source	60%	40%	Non-Idilottolial

#### **Key sectoral achievements**

•	Target	<b>Current Round</b>	Achievement
# of people per functional handpump	max. 250 <sup>3</sup>	139	
% of shelters with at least 1 functional handpump within 200m⁴	100%	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

<sup>1</sup> REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. <sup>2</sup> Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) <sup>3</sup> This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.






# **WASH Site Profile - Camp 2W**





# **Sanitation**

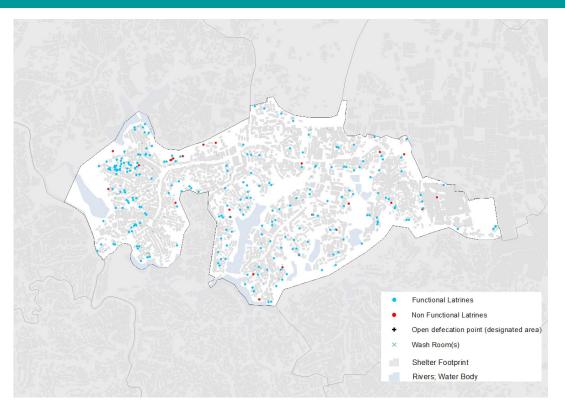


#### **Latrine characteristics**

% of functional/non-functional latrines



Functional (non-full) latrines
Non-functional latrines





#### % of latrines with/without lights



### Key sectoral achievements

	Target	<b>Current Round</b>	Achievement
# of people per functional (non-full) latrine	max. 20 <sup>4</sup>	46	
# of people per safe latrine	N/A	49	N/A
% of shelters with at least one functional latrine block within 50m	100%	89%	
% of functioning handpumps with no latrine within 10m	100%	41%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/Indicators as

<sup>&</sup>lt;sup>4</sup>This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



