

WASH Site Profile - Nayapara RC

Teknaf, Cox's Bazar, Bangladesh (October 2018) GPS Coordinates: 92.25, 20.9571



Summary

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Nayapara RC in Teknaf, Cox's Bazar. Primary data for this round was collected from 17 September to 22 October 2018. Findings should be considered indicative only. Full camp dataset is available

Site Overview

of individuals: 27,032 # of households: 5,732

of shelters: 781 # of individuals

Key WASH Infrastructure

# of latrines:	811
(% functional and safe ²):	(90%)
# of improved water sources: ³ (% functional):	123 (96%)
# of washrooms:	167

Location Map



Water Access

Three most commonly identified types of water points, by functionality:

per shelter:

11%	Handpump / tube well	71%	29%	
38%	Water tank	100%	0%	Functional
46%	Tapstand	98%	2%	Non-functional

35

Key sectoral standards:	Target	Current Round	Achievement
# of people per functional improved water source	max. 250	229	
% of shelters with at least 1 functional improved water source³ within 200m	100%	100%	
% of functional improved water sources with no latrine within 10m	100%	41%	

Functionality

Safety

Sanitation

Latrine characteristics:

Functionality and safety 90% Functional (non-full) and safe²

93%

Safe² Unsafe



10% Non-functional and / or unsafe



Functional (non-full)

Non-functional

	2%	With lights
U	98%	Without lights

97%

3%

Key sectoral standards:	Target	Current Round	Achievement
# of people per functional (non-full) and safe latrine ²	max. 20	37	
# of people per functional (non-full) latrine	max. 20	34	
# of people per safe latrine ²	max. 20	36	
% of shelters with at least one functional and safe latrine ² block within 50m	100%	97%	

Targets based on long term WASH Sector Standards / Indicators for the Rohingya response, Sphere Minimum Standards as well as Department of Public Health and Environment (DPHE) Minimum Standards. Minimum standard/indicator reached, 75%-99% minimum standard/indicator reached, 50-74% minimum standard/indicator reached, indicator reached, Less than 50% of minimum standard/indicator reached.

^{1.} REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further

REACH endinerators conducted a four sweep or all sites and camps (as per boundaries de details to be logged for WASH infrastructure.
 Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a lockable door).
 This includes handpumps / tube wells, tapstands and water tanks.


WASH Site Profile - Nayapara RC

Teknaf, Cox's Bazar, Bangladesh (October 2018)
GPS Coordinates: 92.25, 20.9571





Water Access

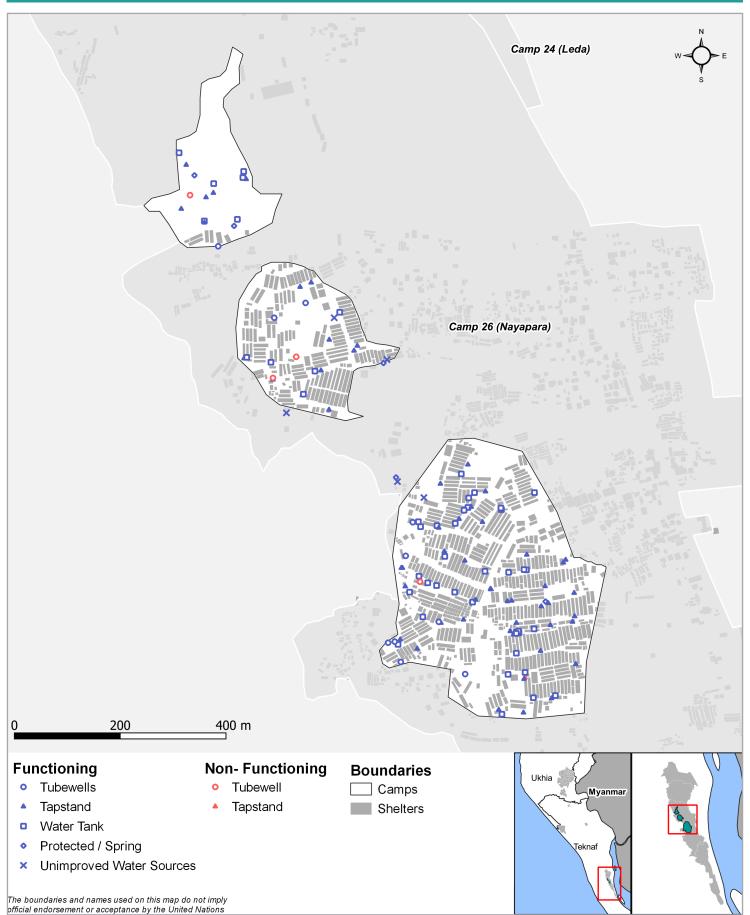

WASH Site Profile - Nayapara RC

Teknaf, Cox's Bazar, Bangladesh (October 2018)
GPS Coordinates: 92.25, 20.9571





Sanitation

