

# WASH Site Profile - Kutupalong RC

Ukhiya, Cox's Bazar, Bangladesh (March 2018) GPS Coordinates: 92.16380142 92.16380142



#### **Summary**


This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Kutupalong RC in Ukhiya, Cox's Bazar. Primary data for this round was collected between 11 March - 2 April 2018.<sup>1</sup> Findings should be considered indicative only.

Site Overview		Key WASH Infrastructure	
# of individuals:	16054	# of latrines (% functional):	844 (90%)
# of households:	3380	% of safe latrines <sup>2</sup> :	89
# of shelters:	1876	# of handpumps	139
# of individuals	7	(% functional):	(75%)
per shelter:		# of washrooms:	79

### **Location Map**



## Access to Water

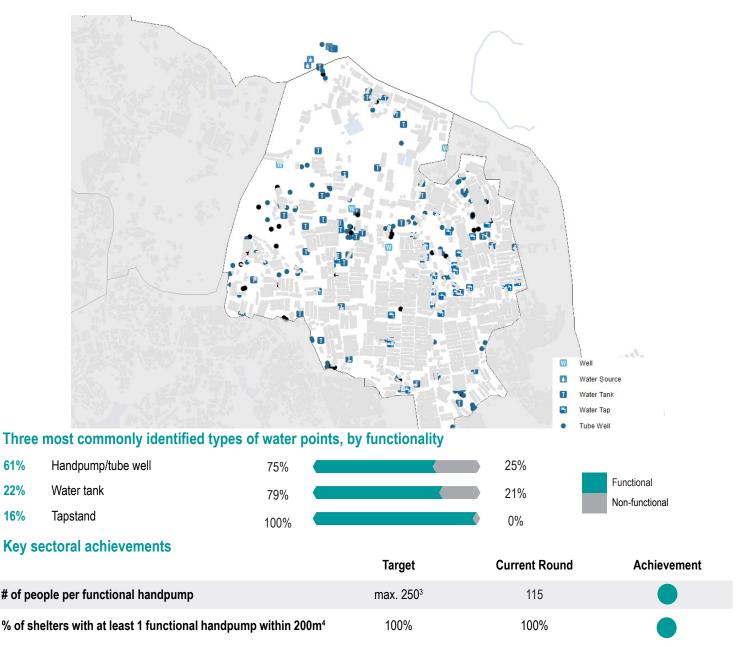

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators 
Minimum standard/indicator reached, 
75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

<sup>1</sup> REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. <sup>4</sup> Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) <sup>3</sup> This farget is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. <sup>4</sup> The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.



61%

22%


16%

For more information, please contact REACH: bangladesh@reach-initiative.org





# Sanitation

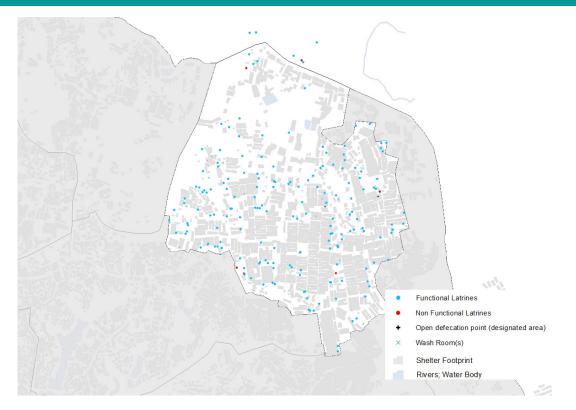

## Latrine characteristics

% of functional/non-functional latrines % of safe/unsafe latrines % of latrines with/without lights 90% Functional (non-full) latrines 89% 0% With lights Safe (roof, door, wall) 10% Non-functional latrines 11% Unsafe 100% Without lights Key sectoral achievements Target **Current Round** Achievement # of people per functional (non-full) latrine max. 204 21

# of people per safe latrine	N/A	21	N/A
% of shelters with at least one functional latrine block within 50m	100%	94%	
% of functioning handpumps with no latrine within 10m	100%	18%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/ Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

<sup>4</sup> This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



For more information, please contact REACH: bangladesh@reach-initiative.org

