

WASH Site Profile - Zone NN

Ukhiya Cox's Bazar, Bangladesh (December 2017)

GPS Coordinates: 21.183819 92.155989



Summary

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Zone NN in Ukhiya, Cox's Bazar. Primary data for this round was collected between 29 November and 17 December 2017.1 Findings should be considered indicative only.

Site Overview

per shelter:

of individuals: 35201
of households: 7948
of shelters: 9270
of individuals 4

Key WASH Infrastructure

of latrines (72%)
(% functional): (72%)

% of safe latrines²: 86%


of handpumps (82%)
(% functional):

of washrooms: 837





Access to Water

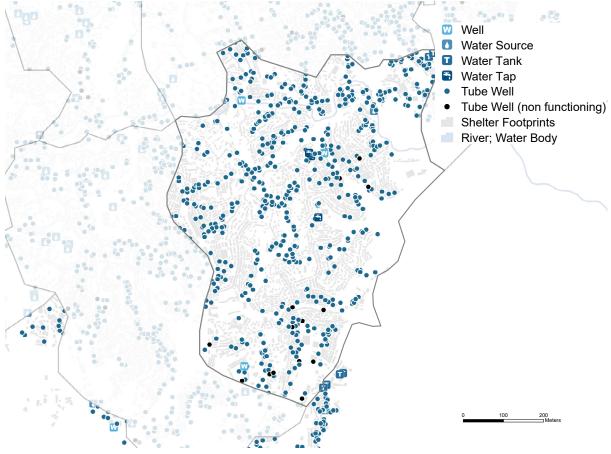

Three most commonly identified types of water points, by functionality

98% Handpump/tubewell	82%	18%	
1% Unimproved water source	80%	20%	Functional Non-functional
0.5% Tapstand	100%	0%	

Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional hand pump	max. 500 ³	154	77	
% of shelters within 200 metres of a functional hand pump ⁴	100%	100%	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

¹ REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. ² Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) ³ This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. ⁴ The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.




WASH Site Profile - Zone NN





Sanitation

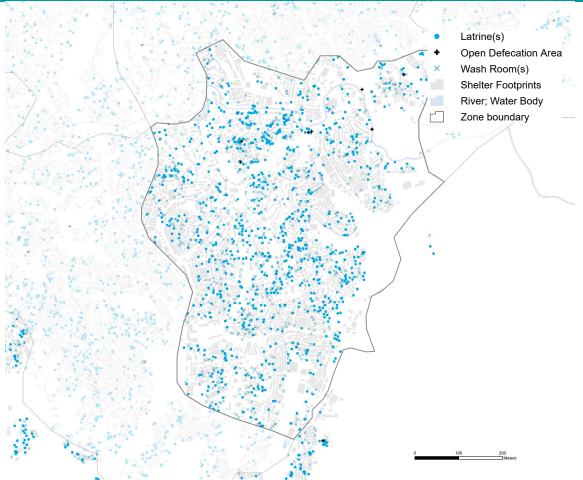

Latrine characteristics

% of functional/non-functional latrines



functional (non-full) latrines
non-functional latrines

% of safe/unsafe latrines:



86% Safe (roof, door, wall)14% Unsafe

% of latrines with/without lights



0% With lights100% Without lights

Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional (non-full) latrine	max. 50 ⁴	38	38	
# of people per safe latrine	N/A	36	32	N/A
% of shelters within 50 meters to a functional (non-full) latrine	100%	100%	100%	
% of latrines that are at least 10 meters away from a water point	100%	58%	64%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

⁴This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



