

# **WASH Site Profile - Zone 00**

Ukhiya Cox's Bazar, Bangladesh (December 2017) GPS Coordinates: 21.211086 92.14222



#### **Summary**

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Zone OO in Ukhiya, Cox's Bazar. Primary data for this round was collected between 29 November 17 December 2017.<sup>1</sup> Findings should be considered indicative only.

### Site Overview

# of individuals: 6506 # of households: 1582 # of shelters: 2614 2 # of individuals

per shelter:

#### **Key WASH Infrastructure**


# of latrines 559 (75%) (% functional): % of safe latrines2: 94% # of handpumps 77 (65%) (% functional): 289 # of washrooms:

# **Location Map**





## Access to Water

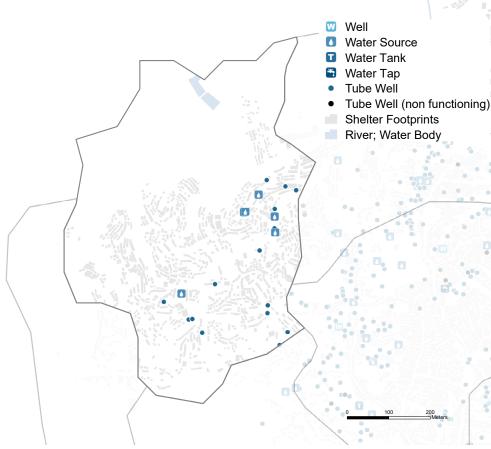

# Three most commonly identified types of water points, by functionality

67% Handpump/tubewell	65%	35%	
13% Water tank	69%	31%	Functional  Non-functional
12% Unimproved water source	73%	27%	1.0100

### Key sectoral achievements

	Target	Previous Round	<b>Current Round</b>	Achievement
# of people per functional hand pump	max. 500 <sup>3</sup>	N/A	130	
% of shelters within 200 metres of a functional hand pump⁴	100%	100%	99%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, •50-74% minimum standard/indicator reached, •Less than 50% of minimum standard/indicator reached

<sup>1</sup> REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. <sup>2</sup> Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) <sup>3</sup> This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. <sup>4</sup> The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.




# **WASH Site Profile - Zone OO**





# **Sanitation**

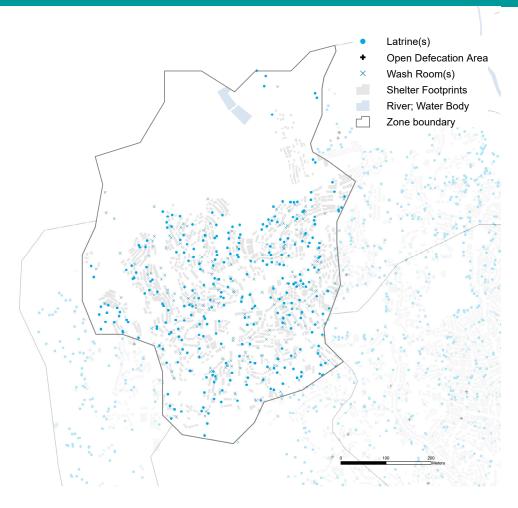

#### **Latrine characteristics**

% of functional/non-functional latrines



75% functional (non-full) latrines25% non-functional latrines

% of safe/unsafe latrines:



94% Safe (roof, door, wall) 6% Unsafe





# Key sectoral achievements

	Target	Previous Round	<b>Current Round</b>	Achievement
# of people per functional (non-full) latrine	max. 50 <sup>4</sup>	N/A	16	
# of people per safe latrine	N/A	N/A	13	N/A
% of shelters within 50 meters to a functional (nonfull) latrine	100%	78%	97%	
% of latrines that are at least 10 meters away from a water point	100%	0%	92%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/Indicators as

<sup>&</sup>lt;sup>4</sup>This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



