

## **WASH Site Profile - Camp 13**

Ukhia, Cox's Bazar, Bangladesh (July 2018) GPS Coordinates: 21.1786, 92.1399



### **Summary**

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Camp 13 in Úkhia, Cox's Bazar. Primary data for this round was collected from 29th May to 22nd July 2018.1 Findings should be considered indicative only. Full camp dataset is available on HDX.

### **Site Overview Key WASH Infrastructure**

of individuals:	40,687	# of latrines:	2,009
of households:	9,538	(% functional and safe <sup>2</sup> ):	(74%)
of shelters:	7,706	# of improved water sources: <sup>3</sup> (% functional):	1,088 (76%)

1024 # of washrooms:

### **Location Map**



### Water Access

Three most commonly identified types of water points, by functionality:

per shelter:

# of individuals

#

80%	Handpump / tube well	70%	30%	
17%	Water tank	97%	3%	Functional
3%	Tapstand	97%	3%	Non-functional

5.3

Key sectoral standards:	Target	<b>Current Round</b>	Achievement
# of people per functional improved water source	max. 250	49	
% of shelters with at least 1 functional improved water source³ within 200m	100%	100%	
% of functional improved water sources with no latrine within 10m	100%	52%	

**Functionality** 

Safety

### Sanitation

### Latrine characteristics:

## **Functionality and safety**



### Functional (non-full) and safe<sup>2</sup> Non-functional and / or unsafe



### 89% Safe<sup>2</sup> 11% Unsafe

### Lighting



Key sectoral standards:	Target	Current Round	Achievement
# of people per functional (non-full) and safe latrine <sup>2</sup>	max. 20	28	
# of people per functional (non-full) latrine	max. 20	25	
# of people per safe latrine <sup>2</sup>	max. 20	24	
% of shelters with at least one functional and safe latrine² block within 50m	100%	100%	

Targets based on long term WASH Sector Standards / Indicators for the Rohingya response, Sphere Minimum Standards as well as Department of Public Health and Environment (DPHE) Minimum Standards. Minimum standard/indicator reached, 75%-99% minimum standard/indicator reached, 50-74% minimum standard/indicator reached, indicator reached, Less than 50% of minimum standard/indicator reached.



<sup>1.</sup> REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further


REACH endinerators conducted a four sweep or all sites and camps (as per boundaries de details to be logged for WASH infrastructure.
 Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a lockable door).
 This includes handpumps / tube wells, tapstands and water tanks.

# **WASH Site Profile - Camp 13**

Ukhia, Cox's Bazar, Bangladesh (July 2018) GPS Coordinates: 21.1786, 92.1399



### **Water Access**

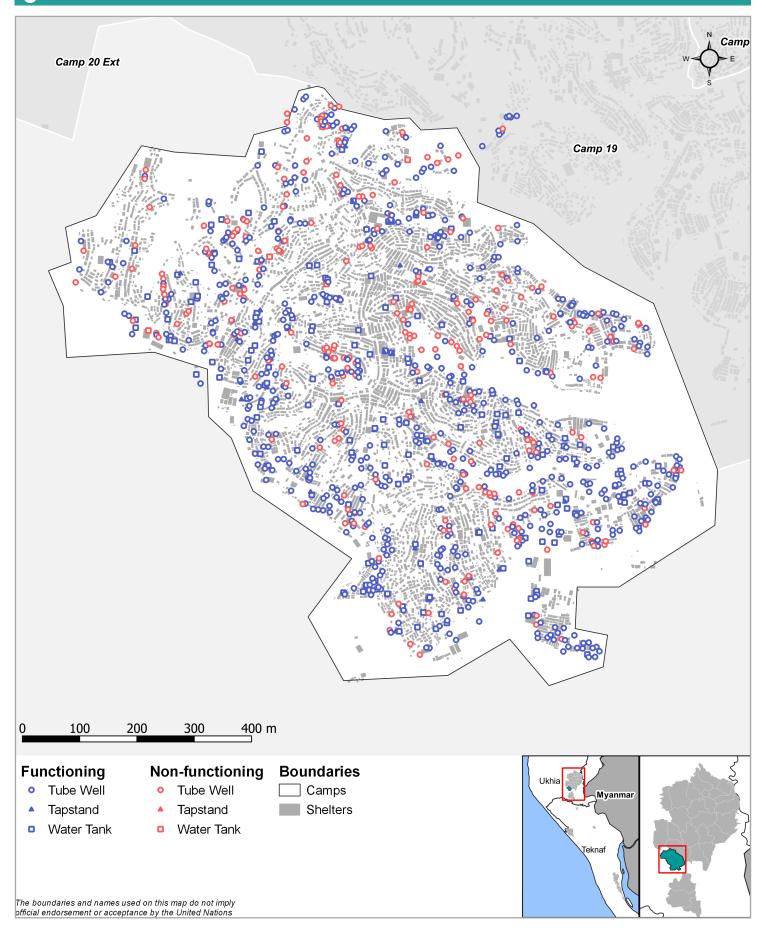



# **WASH Site Profile - Camp 13**

Ukhia, Cox's Bazar, Bangladesh (July 2018) GPS Coordinates: 21.1786, 92.1399





### **Sanitation**

