

WASH Site Profile - Camp 16

Ukhiya, Cox's Bazar, Bangladesh (March 2018) GPS Coordinates: 92.14959179 21.15649186



Summary

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Camp 16 in Ukhiya, Cox's Bazar. Primary data for this round was collected between 11 March - 2 April 2018. Findings should be considered indicative only.

Site Overview

# of individuals:	21665
# of households:	4931
# of shelters:	3172
# of individuals per shelter:	7

Key WASH Infrastructure


# of latrines	612
(% functional):	(90%)
% of safe latrines ² :	93
# of handpumps	272
(% functional):	(73%)
# of washrooms:	434

Location Map





Access to Water

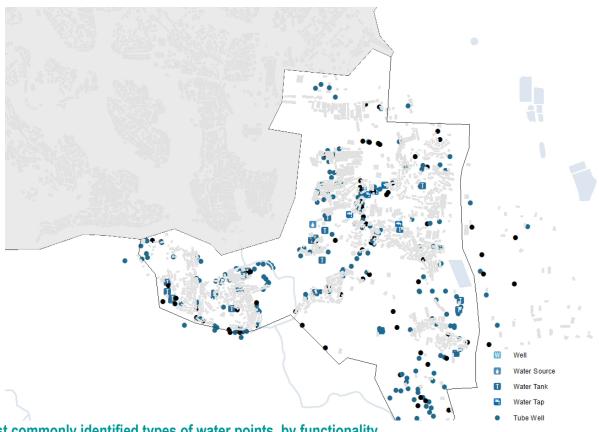

Three most commonly identified types of water points, by functionality

91%	Handpump/tube well	73%	27%	
6%	Water tank	70%	30%	Functional Non-functional
3%	Tapstand	86%	14%	Non-idilictional

Key sectoral achievements

	Target	Current Round	Achievement
# of people per functional handpump	max. 250 ³	80	
% of shelters with at least 1 functional handpump within 200m⁴	100%	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, •50-74% minimum standard/indicator reached, •Less than 50% of minimum standard/indicator reached

¹ REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. ² Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) ³ This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.






WASH Site Profile - Camp 16





Sanitation

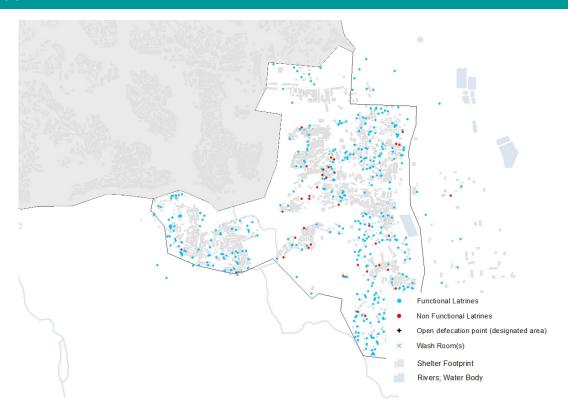

Latrine characteristics

% of functional/non-functional latrines



90% Functional (non-full) latrines10% Non-functional latrines

% of safe/unsafe latrines



93% Safe (roof, door, wall)7% Unsafe

% of latrines with/without lights



Key sectoral achievements

	Target	Current Round	Achievement
# of people per functional (non-full) latrine	max. 20 ⁴	39	
# of people per safe latrine	N/A	38	N/A
% of shelters with at least one functional latrine block within $50m$	100%	90%	
% of functioning handpumps with no latrine within 10m	100%	41%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/Indicators as

⁴This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



