

# **WASH Site Profile - Zone HH**

Ukhiya, Cox's Bazar, Bangladesh (November 2017) GPS Coordinates: 21.198041 92.160132



#### **Summary**

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure witnin Zone HH in Ukhiya, Cox's Bazar. Primary data for this round was collected between 20 October and 9 November 2017.1 Findings should be considered indicative only.

#### Site Overview

per shelter:

# of individuals: 27,500 # of households: 5,500 # of shelters: 1,890 # of individuals 15

#### **Key WASH Infrastructure**

# of latrines 909 (88%) (% functional): % of safe latrines2: 80% # of handpumps 349 (77%) (% functional):

# of washrooms:


1252

**Location Map** 





### **Access to Water**

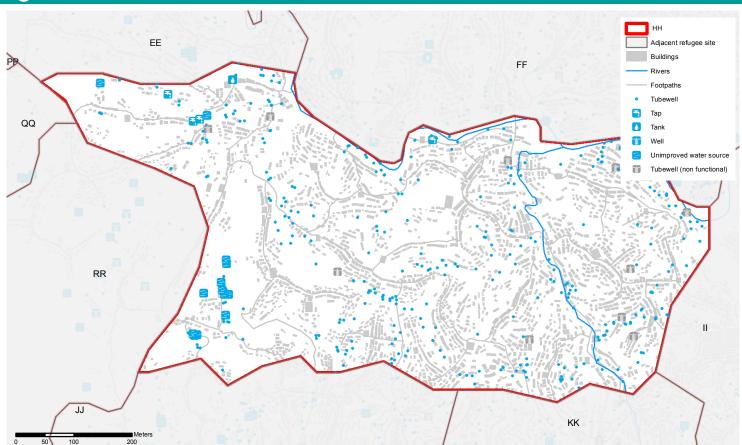

#### Three most commonly identified types of water points, by functionality

95% Handpump/tubewell	77%	23%	
4% Unimproved water source	93%	7%	Functional  Non-functional
1% Tapstand	100%	0%	Non-runctional

#### Key sectoral achievements

	Target	Previous Round	<b>Current Round</b>	Achievement
# of people per functional hand pump	max. 500 <sup>3</sup>	181	147	
% of shelters within 200 metres of a functional hand	100%	100%	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, •50-74% minimum standard/indicator reached, •Less than 50% of minimum standard/indicator reached

<sup>1</sup> REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. <sup>2</sup> Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) <sup>3</sup> This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. <sup>4</sup> The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.






# **WASH Site Profile - Zone HH**





## **Sanitation**

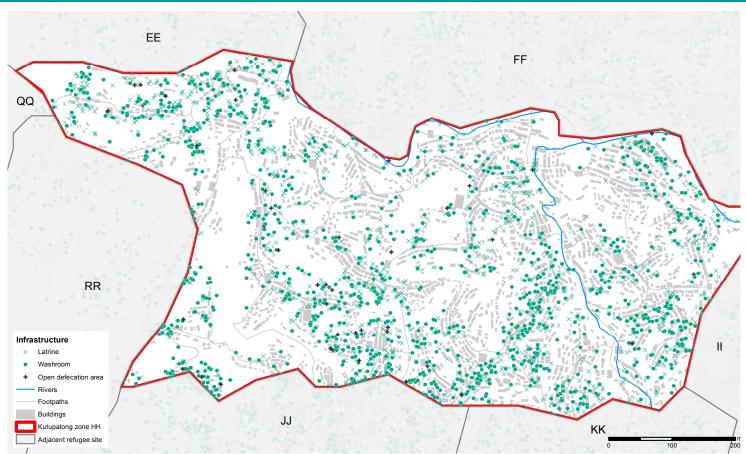

#### **Latrine characteristics**

% of functional/non-functional latrines



88% functional (non-full) latrines12% non-functional latrines

#### % of safe/unsafe latrines:



80% Safe (roof, door, wall) 20% Unsafe

## % of latrines with/without lights



#### Key sectoral achievements

	Target	<b>Previous Round</b>	<b>Current Round</b>	Achievement
# of people per functional (non-full) latrine	max. 50 <sup>4</sup>	118	34	
# of people per safe latrine	N/A	38	14	N/A
% of shelters within 50 meters to a functional (non-full) latrine	100%	88%	100%	
% of latrines that are at least 10 meters away from a water point	100%	78%	80%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/Indicators as

<sup>&</sup>lt;sup>4</sup>This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



