

# WASH Site Profile - Zone QQ

N/A

N/A

261

N/A

Site Overview

# of individuals:

# of households:

# of individuals

# of shelters:

per shelter:

Ukhiya, Cox's Bazar, Bangladesh (November 2017) GPS Coordinates: 21.199504 92.147373

**Key WASH Infrastructure** 

15 (93%)

18 (56%)

0%

43

# of latrines

(% functional):

% of safe latrines2:

# of handpumps

# of washrooms:

(% functional):



**Location Map** 

#### **Summary**

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Zone QQ in Ukhiya, Cox's Bazar. Primary data for this round was collected between 20 October and 9 November 2017.<sup>1</sup> Findings should be considered indicative only.

### Access to Water

## 00 Adjacent refugee site UU Buildinas Footpaths EE Tubewell PP Тар 6 Well Unimproved water source 1 Tubewell (non functional) HH VV RR ww **Meters**

#### Three most commonly identified types of water points, by functionality

86% Handpump/tubewell	56%		44%	
14% Unimproved water source	67%		33%	Functional Non-functional
N/A N/A	N/A	•	N/A	

#### Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional hand pump	max. 500 <sup>3</sup>	N/A	N/A	N/A
% of shelters within 200 metres of a functional hand pump⁴	100%	N/A	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

<sup>1</sup> REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. <sup>4</sup> Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) <sup>3</sup> This farget is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. <sup>4</sup> The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.




For more information, please contact REACH: bangladesh@reach-initiative.org





### Sanitation

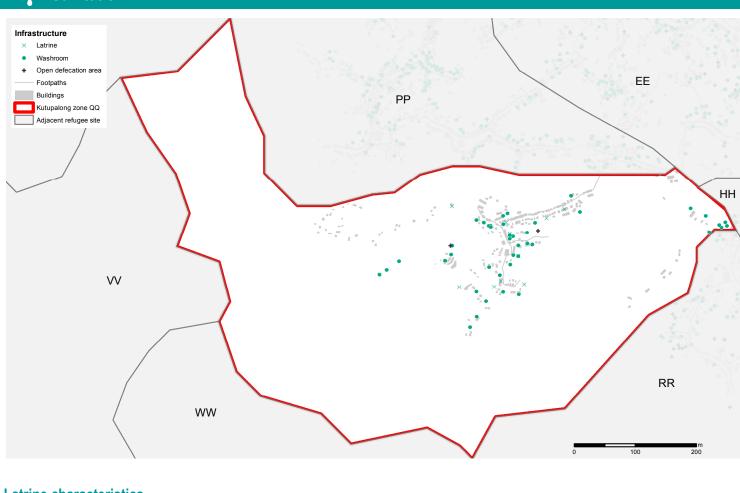

### Latrine characteristics

% of functional/non-functional latrines

93%

7%

functional (non-full) latrines

non-functional latrines

% of safe/unsafe latrines:

0% Safe

100%

% of latrines with/without lights

 Safe (roof, door, wall)
 0%
 With lights

 Unsafe
 100%
 Without lights

#### Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional (non-full) latrine	max. 50 <sup>4</sup>	N/A	N/A	N/A
# of people per safe latrine	N/A	N/A	N/A	N/A
% of shelters within 50 meters to a functional (non- full) latrine	100%	N/A	88	
% of latrines that are at least 10 meters away from a water point	100%	N/A	N/A	N/A

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/ Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

<sup>4</sup> This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



