

WASH Site Profile - Nayapara

Teknaf, Cox's Bazar, Bangladesh (November 2017)

GPS Coordinates: 21.064647 92.224104



Summary

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Nayapara in Teknaf, Cox's Bazar. Primary data for this round was collected between 20 October and 9 November 2017. Findings should be considered indicative only.

Site Overview

of individuals: 34,557
of households: 6,709
of shelters: 2,776
of individuals 12
per shelter:

Key WASH Infrastructure

of latrines 1,308 (80%)
(% functional): 84%

% of safe latrines²: 84%

of handpumps 18 (72%)
(% functional):


357

of washrooms:

Location Map



Access to Water

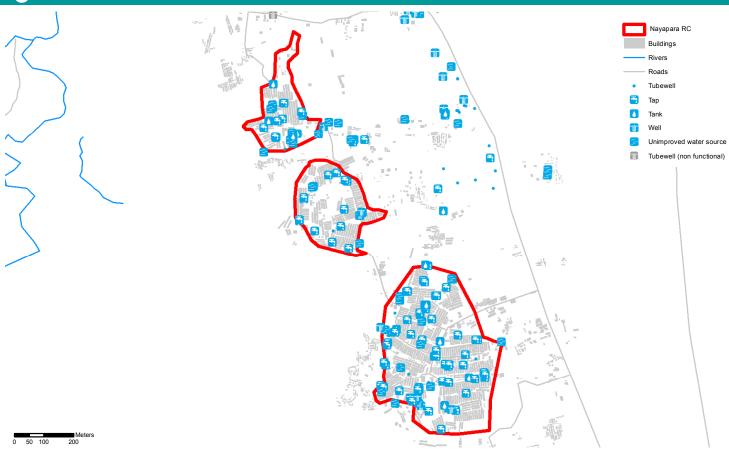

Three most commonly identified types of water points, by functionality

54% Tapstand	99%	1%	
13% Handpump/tubewell	72%	28%	Functional Non-functional
13% Unimproved water source	83%	17%	Non-iunctional

Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional hand pump	max. 500 ³	2658	150	
% of shelters within 200 metres of a functional hand	100%	78%	98%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

¹ REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. ² Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) ³ This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. ⁴ The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.






WASH Site Profile - Nayapara





Sanitation





Latrine characteristics

% of functional/non-functional latrines




80% functional (non-full) latrines20% non-functional latrines

% of safe/unsafe latrines:



84% Safe (roof, door, wall)16% Unsafe

% of latrines with/without lights



Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional (non-full) latrine	max. 50 ⁴	38	33	
# of people per safe latrine	N/A	31	20	N/A
% of shelters within 50 meters to a functional (non-full) latrine	100%	71%	100%	
% of latrines that are at least 10 meters away from a water point	100%	82%	85%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/Indicator reached, as Indicators as well as DPHE Minimum Standards/Indicator reached, as Indicators as Indicators

⁴This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



