

WASH Site Profile - Zone AA

74

Ukhiya, Cox's Bazar, Bangladesh (November 2017)

GPS Coordinates: 21.212935 92.146134



Summary

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Zone AA in Ukhiya, Cox's Bazar. Primary data for this round was collected between 20 October and 9 November 2017. Findings should be considered indicative only.

of individuals: 7,072 # of households: 1,414 # of shelters: 95

of individuals


per shelter:

Key WASH Intrastructure				
# of latrines (% functional):	371 (91%)			
% of safe latrines ² :	89%			
# of handpumps (% functional):	66 (76%)			
# of washrooms:	159			





Access to Water

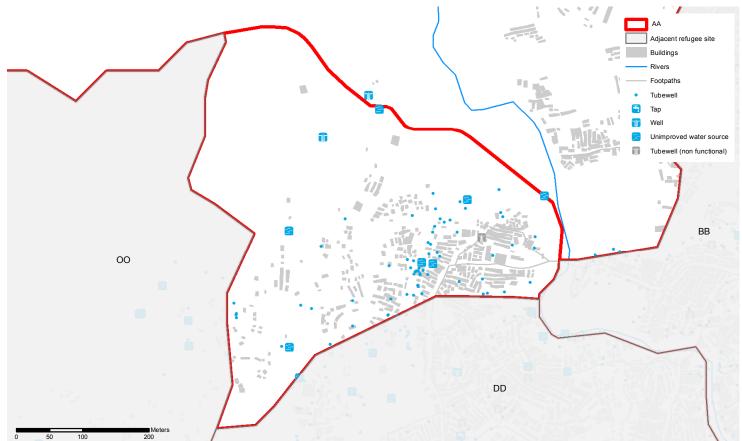

Three most commonly identified types of water points, by functionality

90% Handpump/tubewell	76%	24%	
8% Unimproved water source	67%	33%	Functional Non-functional
1% Well	100%	0%	Trem functional

Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional hand pump	max. 500 ³	1414	141	
% of shelters within 200 metres of a functional hand	100%	100%	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators Minimum standard/indicator reached, 50-74% minimum standard/indicator reached, 10-20-75% minimum standard/indicator reached, 10-20-75% minimum standard/indicator reached

¹ REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. ² Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) ³ This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. ⁴ The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.






WASH Site Profile - Zone AA





Sanitation

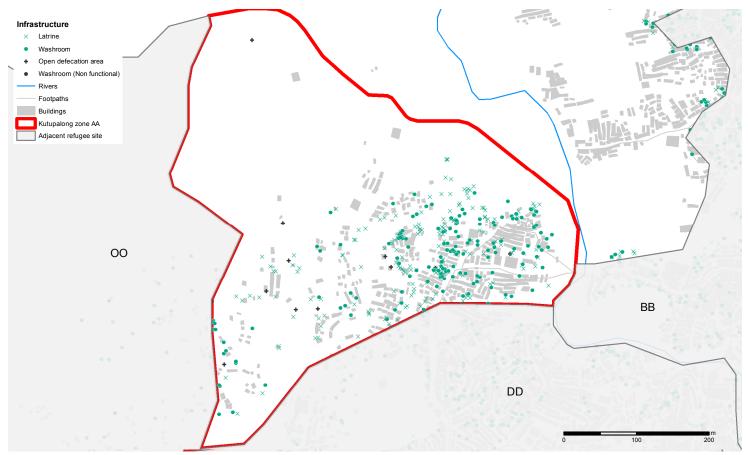

Latrine characteristics

% of functional/non-functional latrines



91% functional (non-full) latrines9% non-functional latrines

% of safe/unsafe latrines:



% of latrines with/without lights



Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional (non-full) latrine	max. 50 ⁴	147	21	
# of people per safe latrine	N/A	21	62	N/A
% of shelters within 50 meters to a functional (non-full) latrine	100%	100%	100%	
% of latrines that are at least 10 meters away from a water point	100%	66%	67%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/Indicators as

⁴This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



