

WASH Site Profile - Zone RR

Ukhiya Cox's Bazar, Bangladesh (December 2017) GPS Coordinates: 21.196231 92.15092




Summary

This profile provides an overview
of water, sanitation and hygiene
(WASH) infrastructure within
Żone RR in Ukhiya, Cox's Bazar.
Primary data for this round was
collected between 29 November
and 17 December 2017.1
Findings should be considered
indicative only.

Site Overview Key		Key WASH Infrast	Key WASH Infrastructure		
# of individuals:	6228	# of latrines (% functional):	429 (88%)		
# of households:	1236	% of safe latrines ² :	94%	KHALI	
# of shelters:	1786	# of handpumps	56 (77%)		
# of individuals per shelter:	4	(% functional): # of washrooms:	179		



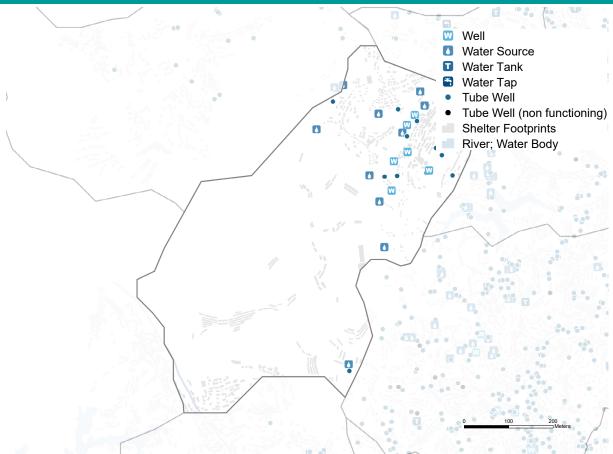

Three most commonly identified types of water points, by functionality

89% H	landpump/tubewell	77%	23%	_
	Unimproved water source Nell	40% 100%	60% 0%	Functional Non-functional

Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional hand pump	max. 500 ³	N/A	145	
% of shelters within 200 metres of a functional hand pump⁴	100%	100%	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached


¹ REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. ⁴ Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) ³ This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. ⁴ The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.



For more information, please contact REACH: bangladesh@reach-initiative.org





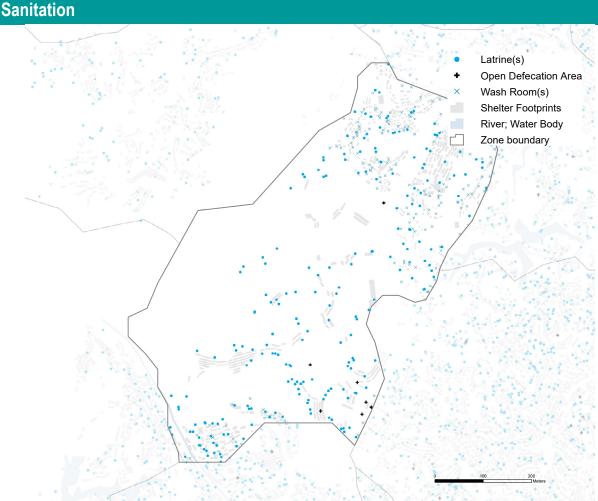

Latrine characteristics

% of functional/non-functional latrines



88% functional (non-full) latrines12% non-functional latrines



% of safe/unsafe latrines:

Safe (roof, door, wall)

Unsafe

% of latrines with/without lights

0% With lights 100% Without lights

Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional (non-full) latrine	max. 50 ⁴	N/A	16	
# of people per safe latrine	N/A	N/A	15	N/A
% of shelters within 50 meters to a functional (non- full) latrine	100%	100%	98%	
% of latrines that are at least 10 meters away from a water point	100%	98%	94%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/ Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

⁴ This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



For more information, please contact REACH: bangladesh@reach-initiative.org

