WASH Sector Cox's Bazar

WASH Site Profile - Zone KK


Ukhiya, Cox's Bazar, Bangladesh (December 2017) GPS Coordinates: 21.192554 92.163044




Summary

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Zone KK in Ukhiya, Cox's Bazar. Primary data for this round was collected between 29 November and 17 December 2017.¹ Findings should be considered indicative only.

Access to Water



KHALI

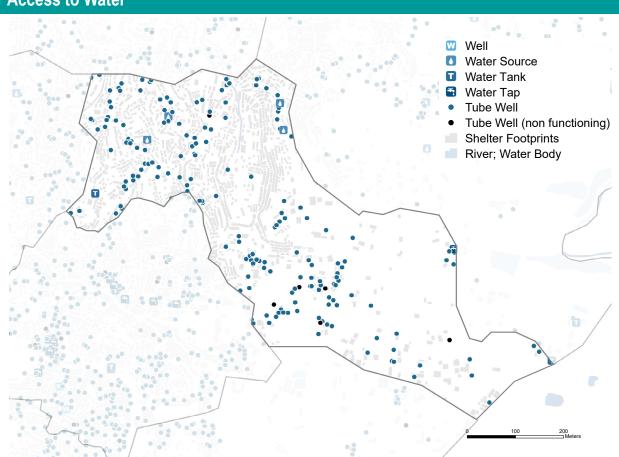

Three most commonly identified types of water points, by functionality



Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional hand pump	max. 500 ³	53	101	
% of shelters within 200 metres of a functional hand	100%	100%	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

¹ REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. ⁴ Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) ³ This farget is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. ⁴ The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.




For more information, please contact REACH: bangladesh@reach-initiative.org





Sanitation

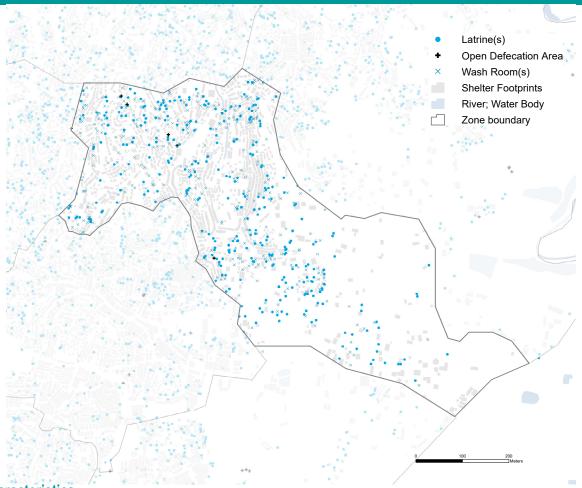

Latrine characteristics

% of functional/non-functional latrines

82%

18%

functional (non-full) latrines

non-functional latrines

% of safe/unsafe latrines:

% of latrines with/without lights

 82%
 Safe (roof, door, wall)
 0

 18%
 Unsafe
 1

0%With lights100%Without lights

Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional (non-full) latrine	max. 50 ⁴	28	37	
# of people per safe latrine	N/A	3	36	N/A
% of shelters within 50 meters to a functional (non- full) latrine	100%	99%	99%	
% of latrines that are at least 10 meters away from a water point	100%	78%	71%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/ Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

⁴ This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



