

WASH Site Profile - Zone HH

Ukhiya Cox's Bazar, Bangladesh (November 2017)

GPS Coordinates:



Summary

This profile provides an overview of water, sanitation and hygiene (WASH) infrastructure within Zone HH in Ukhiya, Cox's Bazar. Primary data represents infrastructure present as of 9 November 2017. Findings should be considered indicative only.

Site Information

of individuals: 275

of shelters: 3133

of individuals 9
per shelter:

of households:

Key WASH Infrastructure

of latrines 909 (88%)
(% functional):
% of safe latrines²: 80%
of handpumps 269 (77%)
(% functional):


of washrooms: 1252

Location Map





Access to Water

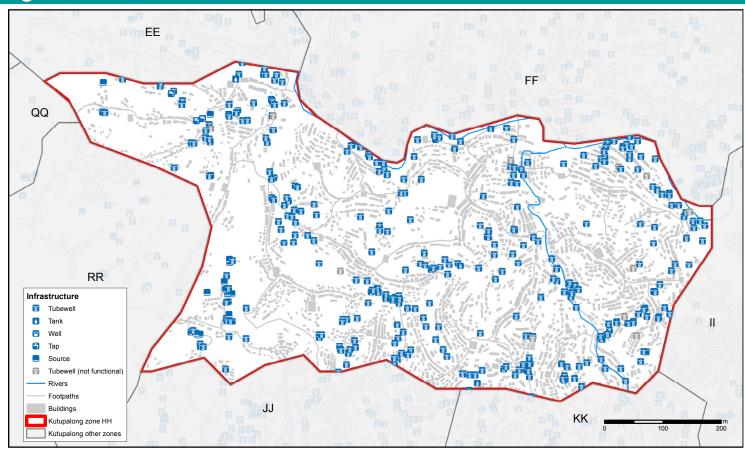

Three most commonly identified types of water points, by functionality

95% Handpump/ tubewell	77%	23%	
4% Unimproved water source	93%	93%	Functioning Not functioning
1% Tapstand	100%	0%	

Key sectoral achievements

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators Minimum standard/indicator reached, 75%-99% minimum standard/indicator reached. 50-74% minimum standard/indicator reached. Less than 50% of minimum standard/indicator reached

	Target	Previous Round	Current Round	Achievement
# of people per functioning hand pump	max. 500 ³	181	102	
% of shelters within 200 metres of a functioning hand pump ⁴	100%	100%	100%	

¹Primary data for this round was collected between 20 October and 9 November 2017. REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. ²Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) ³This target is based on standards for the long term (6 months+), for the immediate and medium phase (0-6 months) it is 500. ⁴The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.










Sanitation

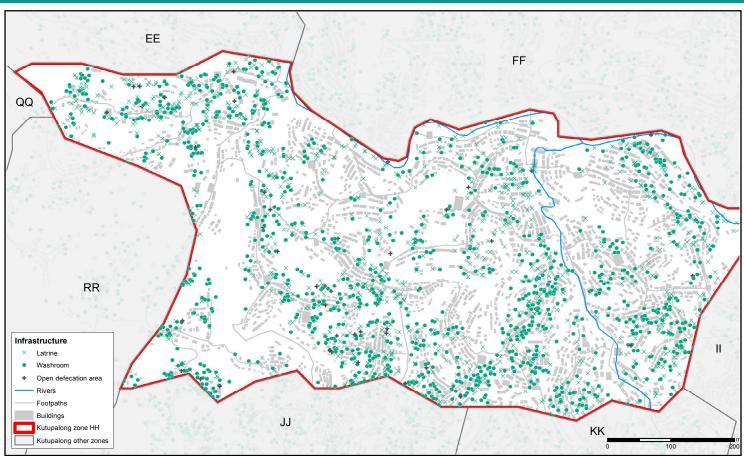

Latrine characteristics

% of functional/ non-functional latrines




functional non full latrinesnon/functional latrines

% of safe/ unsafe latrines:



80% Safe (roof, door, wall)
20% Unsafe





0% With lights100% Without lights

Key sectoral achievements

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached

- 2000 than 00 /0 of minimum dandard/indicator rodonod				
	Target	Previous Round	Current Round	Achievement
# of people per functional (non-full) latrine	max. 50 ⁴	118	34	
# of people per safe latrine	N/A	89	14	N/A
% of shelters within 50 meters to a functional (non-full) latrine	100%	88%	100%	
% of latrines that are at least 10 meters away from a water point	100%	78%	78%	

⁴This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



