

# WASH Site Profile - Zone QQ

Site Overview

Ukhiya Cox's Bazar, Bangladesh (December 2017) GPS Coordinates: 21.199504 92.147373




### **Summary**

This profile provides an overview
of water, sanitation and hygiene
(WASH) infrastructure within
Zone QQ in Ukhiya, Cox's Bazar.
Primary data for this round was
collected between 29 November
and 17 December 2017.1
Findings should be considered
indicative only.

# of individuals:	1490	# of latrines (% functional):	121 (84%)
# of households:	431	% of safe latrines <sup>2</sup> :	69%
# of shelters:	1326	# of handpumps	50 (78%)
# of individuals	1	(% functional):	
per shelter:		# of washrooms:	141

**Key WASH Infrastructure** 

# Location Map

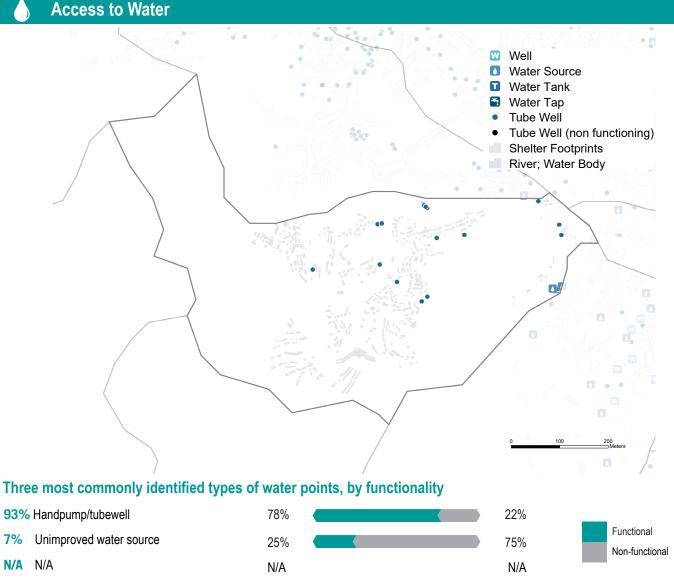

### Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional hand pump	max. 500 <sup>3</sup>	N/A	38	
% of shelters within 200 metres of a functional hand pump⁴	100%	100%	100%	

Targets based on WASH Sector Standards/Indicators for the Rohingya response, Sphere Minimum Standards/Indicators as well as Department of Public Health and Environment (DPHE) Minimum Standards/Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, • Less than 50% of minimum standard/indicator reached


<sup>1</sup> REACH enumerators conducted a full sweep of all sites and camps (as per boundaries defined by ISCG) and used an Open Data Kit (ODK) form to log all key infrastructure observed during this sweep, with further details to be logged for WASH infrastructure. <sup>4</sup> Safe refers to fully covered latrines (i.e. a latrine with four walls, a roof and a door) <sup>3</sup> This target is based on standards for the medium and long term (3 months +), for the immediate phase (0-3 months) it is 1000. <sup>4</sup> The distance is based on standards for the long term (6 months+), for the immediate phase (0-3 months) it is 750 metres and for the medium phase (3-6 months) 500 metres.



For more information, please contact REACH: bangladesh@reach-initiative.org





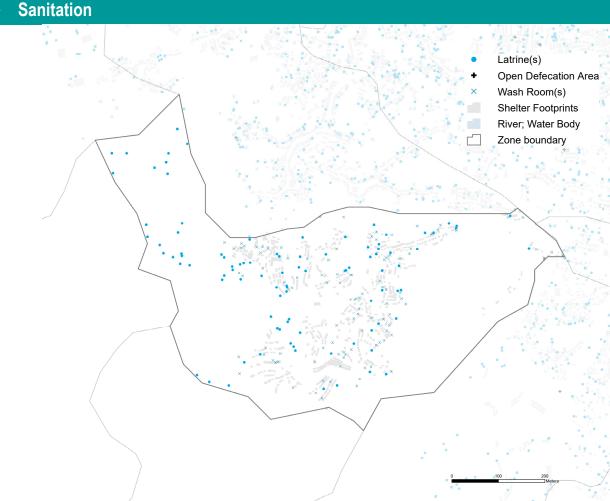

### Latrine characteristics

% of functional/non-functional latrines



**84%** functional (non-full) latrines 16% non-functional latrines

% of safe/unsafe latrines:

69% 31%

Unsafe

% of latrines with/without lights

Safe (roof, door, wall) 0% With lights 100% Without lights

## Key sectoral achievements

	Target	Previous Round	Current Round	Achievement
# of people per functional (non-full) latrine	max. 50 <sup>4</sup>	N/A	15	
# of people per safe latrine	N/A	N/A	18	N/A
% of shelters within 50 meters to a functional (non- full) latrine	100%	97%	91%	
% of latrines that are at least 10 meters away from a water point	100%	90%	91%	

Targets based on WASH Sector Standards/Indicators for Rohingya response, Sphere Minimum Standards/Indicators as well as DPHE Minimum Standards/ Indicators • Minimum standard/indicator reached, • 75%-99% minimum standard/indicator reached, • 50-74% minimum standard/indicator reached, Less than 50% of minimum standard/indicator reached

<sup>4</sup> This target is based on standards for the long term (6 months +), for the immediate phase (0-3 months) it is 100 and for the medium phase (3-6 months) 75.



